

# M900EKN

8" Windows Rugged Tablet with Intel® Celeron® N6211



CE

FC

## KEY FEATURES

- Intel Celeron N6211 Elkart Lake Processor rugged tablet PC
- 8" 1280x 800 IPS LED panel with direct optical bonding
- Integrated GigaLAN Port
- USB 3.0 type A, USB 3.0 type C connectors
- Sunlight readable with antiglare solution
- Projected capacitive (PCAP) multitouch
- IP65 waterproof and dustproof

## INTRODUCTION

Winmate M900 Rugged Tablet Series delivers compact, high-performance solutions for industrial and field applications. These tablets have an 8" IPS display that is easy to read in sunlight. The screen uses direct optical bonding and PCAP multitouch. This design ensures clear visibility and quick responses in any setting. The M900 Series is built to last. It has IP65-rated waterproof and dustproof protection. It features USB Type A and C connectors. You can also add smart card and barcode readers for more options. Ideal for vehicle gateway connections, industrial automation, and fieldwork tasks.

## SPECIFICATIONS

### Display

Type	Projected Capacitive Multi Touch	Bonding	Optical Bonding for Sunlight Viewability
Resolution	1280x800	Size	8.0 inches
Contrast Ratio	1500:1	Panel Brightness	800.0 nits
View Angles	80,80,80,80		

### System Specification

Processor	Intel Celeron N6211 1.2 GHz (turbo boost up to 2.60 GHz) Intel Pentium N6415 1.2 GHz (turbo boost up to 3.00 GHz) (Optional)	Memory	4GB LPDDR4 8GB LPDDR4 (Optional)
Storage	128GB SSD Additional storage available with micro SDXC card slot 256GB SSD (Optional) 512GB SSD (Optional)	Security	Trusted Platform Module (TPM) 2.0
Operating System	Windows 10 IoT Enterprise LTSC (64 bit) Windows 11 IoT Enterprise LTSC (64 bit) (Optional)	WLAN	Support
BT	Support	WWAN	4G LTE (Optional)
GNSS	GPS, GLONASS	RFID	Mutually Exclusive with Barcode Reader HF RFID Reader 13.56 MHz (Optional) LF RFID Reader 125 KHz (Optional)
Sensors	Light sensor/ G-sensor / Gyro	Smart Card Reader	Smart Card Reader Comply with ISO7816-1.2.3 T=1 and T=0 protocol (Optional)

### Camera

Front Camera	2MP Front Camera	Rear Camera	8MP Rear Camera with Autofocus and LED Light
--------------	------------------	-------------	--

## Mechanical

Dimension	225 x 148 x 20.5 mm ( 10 x 7.76 x 0.8 inches)	Weight	0.9 kg with battery
Cooling System	Fanless Design		

## IO Ports

USB Port	1 x USB 3.0 (Type A), 1 x USB 3.0 (Type C)	SD Card Slot	1 x Micro SDXC Slot
SIM Card Slot	1 x Micro SIM card slot	Audio	1 x Audio combo 3.5mm audio combo jack Dual Digital Mic With Noise Cancellation Dual Speaker
LAN	1 x RJ45-10/100/1000 GigaLAN port	Indicator	4x LED Indicator for Power, Battery, HDD, RF status
Docking Connector	1 x 19-pin docking connector		

## Environment

Operating Humidity	10% to 90% RH, non-condensing	Operating Temperature	-20°C to 60°C
Storage Temperature	-30°C to 70°C (-22°F to 158°F)	Shock	MIL-STD-810H Method 516.8 Procedure I
Vibration	MIL-STD-810H Method 514.8 Procedure I	IP rating	IP65
Drop	MIL-STD-810H Method 516.8, 5 ft		

## Certification

Certification	CE, FCC
---------------	---------

## Security Function

SOTI MobiControl	SOTI MobiControl Compliance
------------------	-----------------------------

## Control

Button	1 x Power, 1 x menu, 3 x Programmable Function Keys
--------	--

## Power

Battery	7.6V, typ. 4200 mAh Li Polymer Battery (2S2P)	Battery Operating Time	Standard. Battery: 6 hours
Power Rating	19V DC	Adapter	100-240V, 50-60Hz / 19V DC


## Accessory

Accessory	Adapter and Power Cord Standard Battery Pack	Optional Accessory	Desk Dock (Optional) Vehicle Dock (Optional) USB-A Cable (Optional) Battery Charger (Optional) Vehicle Charger (Optional) Hand Strap (Optional) Vehicle Cradle (Optional) LAN Cable (Optional) Capacitive Stylus (Optional)
-----------	---	--------------------	---

## Barcode Scanner

Barcode Scanner	1D/2D barcode reader (Optional)
-----------------	---------------------------------

## DIMENSIONS UNIT:MM

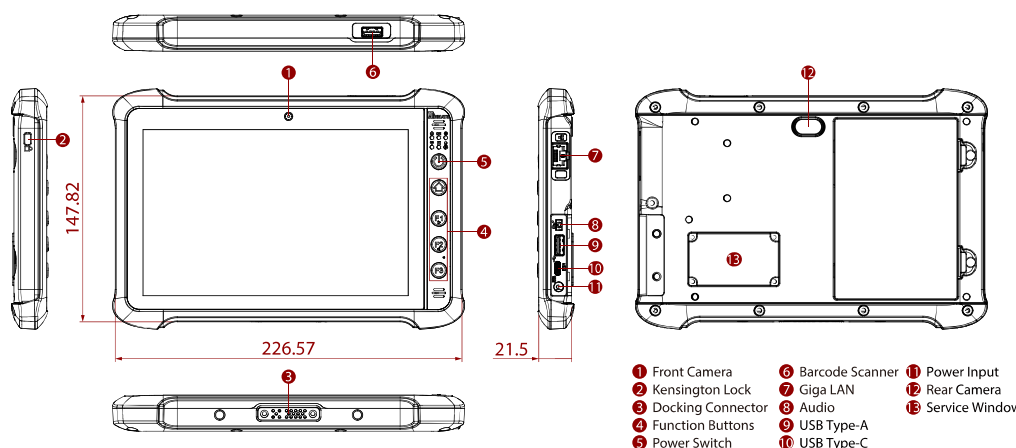

## NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.